Product Data Sheet



Emergency LED Downlights - White






















FEATURES

- Low power consumption
- 50,000hr LED energy efficient, long life
- Quick fit bracket for fast ceiling and wall mount
- Easy testing and maintenance

Non-maintained

- 3 hour discharge
- 3 year warranty
- 1.2m flex and plug (recessed only surface mounted hard-wired
- Designed and manufactured to AS/NZS2293.3

DIMENSIONS

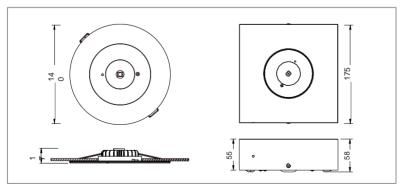

SPECIFICATIONS

	Recessed	Surface Mount
Antec Order Code	EL-DOWN-REC	EL-DOWN-SM
Input Voltage	240v	
Wattage	3w	
Construction	Polycarbonate body with aluminium heat sink	
Mounting	Recessed and surface mount	
Operating Mode	Maintained	
Testing System	Manual	
Battery	Lithium 2200mAh 3 hour discharge	
AS2293 Classification	D40	
Applicable Standard	AS/NZS2293.3	
Operating Temp	1°C to 40°C	
Dimensions		

