

## Standard Universal LED Exit Light


TRADELIKE



### FEATURES

- Low 3w standby power consumption
  - Includes both single and double sided decals in running man "Pictograph" and the "EXIT" decal
  - Large terminal block & cable entry
  - Polycarbonate body with polycarbonate diffuser
  - Wall, ceiling single-sided & ceiling double-sided mount
- Maintained**
- Manual test switch
  - 2200mAh lithium battery technology
  - Designed and manufactured to AS/NZS2293.3

### DIMENSIONS

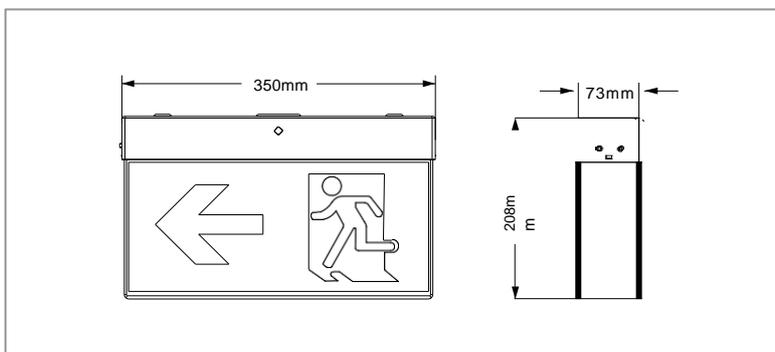

### SPECIFICATIONS

Antec Order Code	EL-UNHLED-STD
Input Voltage	240v
Construction	Polycarbonate
Mounting	Ceiling and wall
Operating Mode	Maintained
Testing System	Manual
Battery	Lithium 2200mAh 3 hour discharge
Classification	C0: D12.5 C90: D8
Viewing Distance	24m
Applicable Standard	AS/NZS2293.3
Lamps	LED 50,000hrs
Operating Temp	1°C to 40°C
Dimensions (mm)	350x208x73
Weight	1.39kg